


16' x 40' OFFICE/STORAGE SMS-N-40-2W

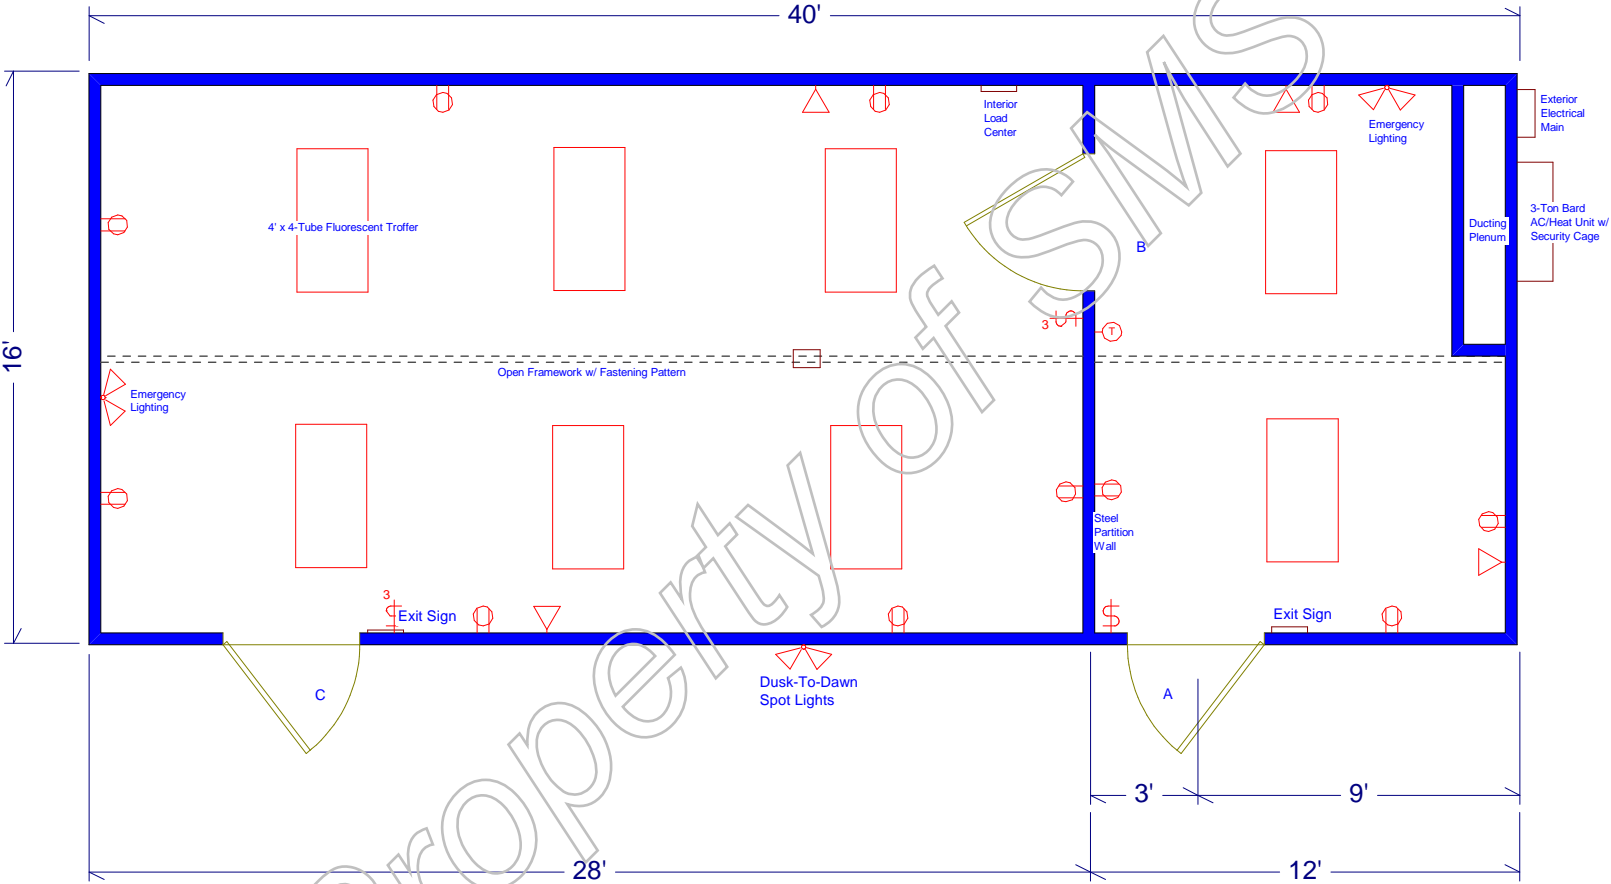

- 1.) Finished Interior To Consist Of: 1.5" Foam Insulation, Acoustic Ceiling, & VCT Flooring.
- 2.) Install 1" Spray Foam Under Floor
- 3.) Doors A & B: 4068 Steel Entry, Keyed Different w/ Leverlock, Deadbolt, & Lockbox
- 4.) Door C: 4068 Emergency Exit Door w/ Panic Hardware Keyed Same As Door B. (NO ENTRY FROM EXTERIOR)
- 5.) Central Ducting With Security Registers, Returns, & Thermostat
- 6.) Exit Signs On All Egress Doors A & C
- 7.) Replace Original Cargo doors w/ 16-Gauge Steel